



	D200	D325
	200 l	325 l
1:18	11 kg	18 kg
1:20	10 kg	16 kg

### Features

- Precise residual moisture measurement
- Fast drying times
- Low energy consumption
- High efficiency through axial-radial air flow
- Convenient loading/unloading through large door
- Optimised waste heat recovery
- Intuitive touch operation with 4.3" colour display
- Expert control
- 24 languages
- 18 standard drying programmes
- Time preset
- Crease protection
- Reversing drum
- Stainless steel drum
- Maintenance-free direct drive
- Robust construction for high durability
- Powder-coated steel housing, matt grey
- Quietness < 70 db(A)
- Fluff filter drawer
- Removable of bottom front panel to access with fork lift

### Options

- Expert+ control
- Integrated prepaid card system
- Potential-free contact for external ventilation control
- Central fresh air intake 200 mm
- Central fresh air intake 160 mm
- Air vent 160 mm
- artLine (anthracite)
- Stainless steel housing
- Door hinge on the left ex works; changeover is possible on site
- Fluff filter drawer, lockable
- Machine plinth 270 mm

### Features and benefits



- Fast drying time  
D200: 32 min / D325: 34 min
- Energy-efficient
- Durable and robust
- Low-maintenance



- Swiss made
- Intuitive operation
- profiClean and wetClean programmes
- Quiet



- Product options

# proLine D200 / D325 technical data

Company or brand name		Schulthess	Schulthess
<b>Appliance type</b>		<b>Dryer</b>	<b>Dryer</b>
<b>Type or sales description</b>	<b>proLine</b>	<b>D200</b>	<b>D325</b>
Product No		4253	4255

## Eigenschaften

Load (1:18)	kg	11	18
Load (1:20)	kg	10	16
Drum capacity	l	200	325
Drum diameter	mm	728	728
Drum depth	mm	480	780
Diameter of filling aperture	mm	580	580
Evaporation rate	l/min	0,17	0,25
Drying rate	kg/h	20	32
Energy consumption <sup>1)</sup>	kWh / kWh/kg	6,25 / 0,57	10,0 / 0,56

## Programmes

Programme duration <sup>1)</sup>	min	32	34
----------------------------------	-----	----	----

## Ventilation installation

Extraction rate (max.)	m <sup>3</sup> /h	480	840
Air outlet	Ø mm	200	200
Cable resistance on site	max. Pa	200	200

## Dimensions

Width	mm	790	790
Height	mm	1350	1350
Height with plinth	mm	1620	1620
Depth	mm	900	1200

## Electric connection

Supply voltage	V	400 3N~	400 3N~
Connected load	kW	15	21,2
Heat output	kW	14,4	20,6
Performance Drive	kW	0,6	0,6
Fuse protection	AT	25	32


## Safety and maintenance

Complies with Swiss safety regulations		yes	yes
Complies with the European Machinery Directive		2006 / 42 / EC	2006 / 42 / EC
Warranty	Year	1	1
Maintained by		authorized dealer	authorized dealer
Name and address of manufacturer		Schulthess Maschinen AG CH-8633 Wolfhausen	Schulthess Maschinen AG CH-8633 Wolfhausen
Country of origin		Switzerland	Switzerland

- 1 Electrical connection
- 2 Main switch
- 3 Emergency stop button
- 4 Type plate
- 5 Air outlet

Explanations • available – not available

1) Cotton cabinet dry, output moisture 47 %, residual moisture 0%

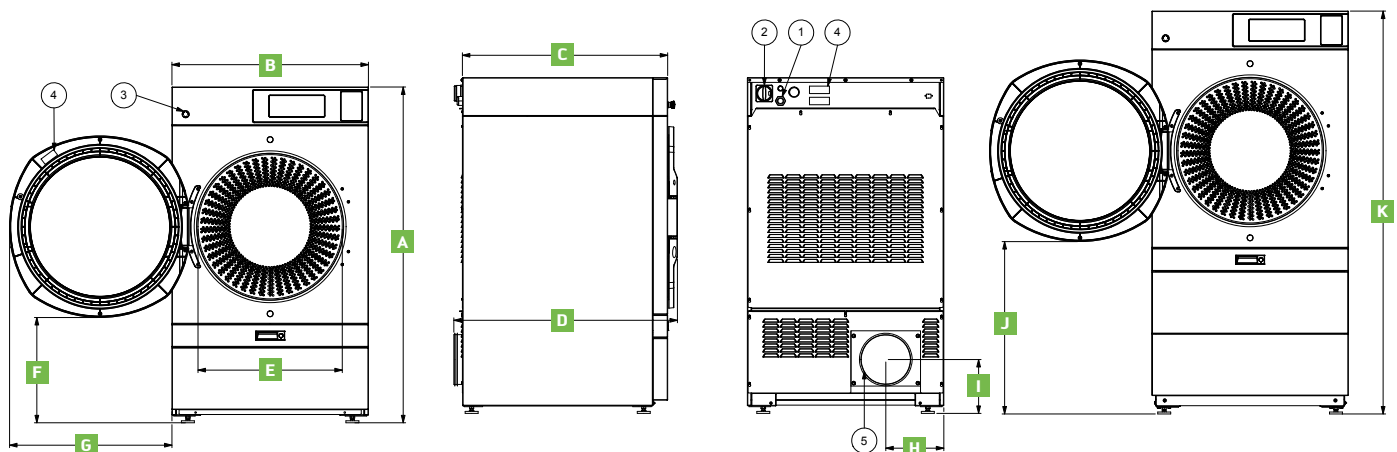

## Dimensions

	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
<b>D200</b>	1350	790	825	900	580	425	655	235	220	695	1620	196
<b>D325</b>	1350	790	1125	1200	580	425	655	235	220	695	1620	233